## ISR DISC SPECIFICATION/ORDERING FORM ISI



If you have any difficulties, or questions regarding completing this form, please contact us at HPS.

	P5
HARWOOD	PERFORMANCE SOURCE

Harwood Performance Source Ltd

Derwent House • New Street • Alfreton Derbyshire • DE55 7BP • United Kingdom


Tel: 01773 831122 Fax: 01773 831040 Web: www.bikehps.com


Disc rotor

thickness is always 5mm

4

Year of Manufacture

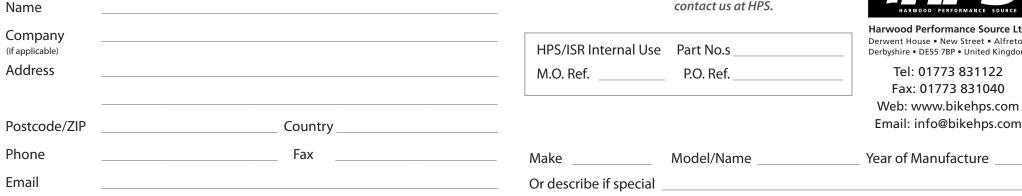

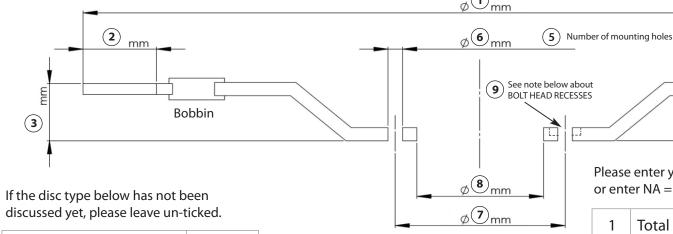

Type of Disc	Code
Dampened Full Floating	23F
Full Floating	23A 🗌
Semi Floating	23B
Solid Drilled (one piece)	23C
Solid Undrilled	23D
Classic Drilled	23GD
Classic Undrilled	23G 🗌

(9) Some discs have BOLT HEAD RECESSES, if yours do, please state here:

Depth & Diameter

Disc Handing	Quantity Required
Right side (RH)	
Left side (LH)	

Please enter your measurements in millimetres in the table below, or enter NA = Not Applicable or UNK = Unknown.

**Bobbin** 

1	Total disc diameter	
2	Swept area/pad track width (allow clearance between bobbins and pad backing plate)	
3	Total disc height (inc. 5mm rotor thickness)	
4	Offset (mounting face to rear rotor face)	
5	Number of mounting holes	
6	Diameter/size of mounting holes	
7	Pitch Circle Diameter/PCD of mounting holes	
8	Centre bore/hole diameter	